



INSTRUCTIONS FOR CVC-562SD COLOR DISCREET CEILING MOUNTED CAMERA

INTRODUCTION

THIS COLOR CCD DISCREET CEILING MOUNTED CAMERA FEATURES AN EXCEPTIONAL FIELD OF VIEW. THE CVC-562SD CAN BE ADJUSTED TO VIEW STRAIGHT DOWN OR OUT OF THE SIDE, AND CAN ROTATE IN ANY DIRECTION. WITH 350 LINES RESOLUTION AND A BUILT-IN ELECTRONIC IRIS, THE CVC-562SD OFFERS A SHARP IMAGE IN A VARIETY OF LIGHTING CONDITIONS. THE BNC STYLE VIDEO OUTPUT CAN BE CONNECTED TO THE VIDEO INPUT OF A TV, VCR OR MONITOR. A 12V DC POWER SUPPLY IS INCLUDED.

NOTE : THE POWER SUPPLY MUST BE CENTER POSITIVE.

CABLE OUTPUTS
BNC - VIDEO
DC JACK - POWER

SPECIFICATIONS


IMAGE DEVICE	1/4" interline color CCD
SCANNING SYSTEM	NTSC color 525 TV lines 60 f/60/sec.
EFFECTIVE PIXEL ARRAY	512(Horizontal) x 492(Vertical)
RESOLUTION	330 TV lines
SHUTTER CONTROL	Auto 1/80 - 1/100,000 sec
LENS/ANGLE OF VIEW	3.6mm conical pinhole lens. Hor. 72° Vert. 50°
SCANNING FREQUENCY	Hor. 15.734KHz. Vert. 60Hz
MINIMUM ILLUMINATION	1 lux
VIDEO S/N RATIO	Greater than 48dB
VIDEO OUTPUT LEVEL	Color composite video signal 1V p-p 75Ω
POWER REQUIREMENTS	12V DC supplied by AC adaptor - UL & CSA
POWER CONSUMPTION	230mA typ.
OPERATING TEMPERATURE	14° F - 122° F
DIMENSIONS	3-2/5"(Dia) x 1-3/8"(H)

ALWAYS USE DISCRETION WHEN INSTALLING VIDEO AND/OR AUDIO SURVEILLANCE EQUIPMENT ESPECIALLY WHEN THERE IS PERCEIVED PRIVACY OR AN EXPECTATION OF PRIVACY. INQUIRE REGARDING FEDERAL, STATE AND/OR LOCAL REGULATIONS APPLICABLE TO THE LAWFUL INSTALLATION OF VIDEO AND/OR AUDIO RECORDING OR SURVEILLANCE EQUIPMENT. PARTY CONSENT MAY BE REQUIRED.


INSTALLATION

* STRAIGHT DOWN VIEW :


NOTE SET SCREW POSITION

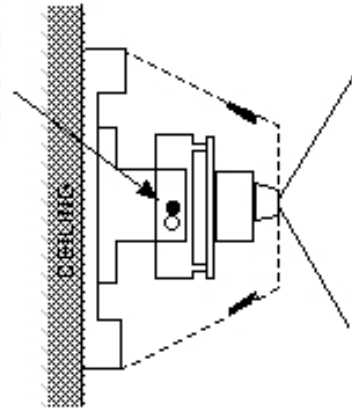

* SIDE VIEW :

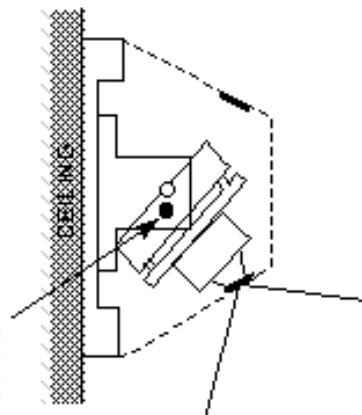

NOTE : THE BLACK INTERNAL LINER CAN BE ROTATED TO HELP AIM THE CAMERA

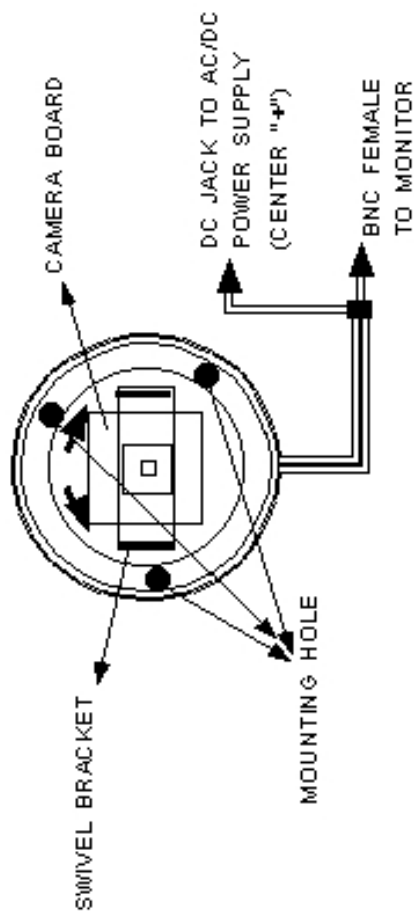

CSI/SPECO

200 HAWK HIGHWAY, P.O. BOX 726 AMITYVILLE, NEW YORK 11701-0726
631-657-3700, 1-800-646-5516, FAX 631-657-0142 WWW.CSI-SPECO.COM